

Datasheet



RackStation

RS11626xs+

Synology

RS11626xs+



Flexible High-Performance Enterprise Storage with Multi-Petabyte Scalability

The RS11626xs+ unifies data management, backup, and surveillance in a storage system scalable beyond 2 PB. It includes four built-in 2.5" bays for SSD caching¹ and dual embedded M.2 NVMe SSDs running DSM in RAID 1, providing redundancy and offloading system activity from the data pool. A comprehensive set of reliability, availability, and serviceability features ensures continuous operation.

- **On-Demand Expansion**
Scale up to 116 drive bays with eight Synology RX1222sas Expansion Units²
- **High Performance**
Over 234,000 4K random write IOPS and 10,500/8,200 MB/s sequential read/write throughput³
- **Versatile Networking**
Built-in dual 10GbE RJ45 ports with expansion via 10/25GbE NICs and Fibre Channel adapters⁴
- **Availability Safeguards**
Hot-swappable drives, online volume expansion, dual power supplies, and high-availability clustering help keep services online
- **Storage Tiering**
Automatically offload inactive data to lower-cost tiers to optimize storage ROI and preserve high-performance storage for active workloads

Engineered for Intensive Workloads

The 3U 20-bay (16 × 3.5"/2.5" bays and 4 × 2.5" bays) RS11626xs+ delivers the performance, reliability, and scalability required by enterprise environments.

- **High-speed performance:** Over **234,000 4K random write IOPS** and **10,500/8,200 MB/s sequential read/write** performance supports demanding workloads³
- **Massive scalable capacity:** Simple expansion to **up to 116 bays** (112 × 3.5"/2.5" bays and 4 × 2.5" bays) is available as needed with eight Synology [RX1222sas Expansion Units](#)²
- **Built-in system drives:** Two **built-in M.2 SSD system drives** isolate OS data from storage data, providing DSM failover protection and minimizing wear on storage drives
- **Flexible storage:** Support for all-flash and hybrid configurations allows users to add SATA SSDs as storage volumes or as read/write cache¹ to accelerate HDD volumes
- **Supports M.2 NVMe acceleration:** Compatible M.2 NVMe drives can be used via an add-in card to create cache without occupying drive bays¹
- **Versatile networking:** **Dual built-in 10GbE ports** can be supplemented with 10/25GbE NICs and Fibre Channel adapters via two PCIe 4.0 ×16 expansion slots⁴
- **Maximum uptime:** Hot-swappable drive trays, fans, and dual power supplies, combined with online volume management, allow for maintenance and service continuity without downtime
- **High-reliability expansion architecture:** SAS multipathing prevents single points of failure from affecting other expansion units, ensuring higher data and service availability
- **Remote diagnostics:** Out-of-band management enables administrators to control powered-down devices remotely and access critical logs through a dedicated interface for faster issue resolution

Intelligent Storage Optimization

[Synology Tiering](#) intelligently manages data across performance and capacity tiers to **maximize storage efficiency** and **improve storage economics** by automatically placing colder data on cost-effective tiers. The RS11626xs+ can be configured as part of a hot or cold storage tier depending on deployment requirements. Key capabilities include:

- Automatic relocation of infrequently accessed data from local high-performance storage to a remote cold tier
- Tiering policies based on last access time, available capacity, or a defined schedule
- Full data accessibility with frequently used files automatically restored to the hot tier

- Centralized dashboard for monitoring folder status, data distribution, capacity usage, and tiering activity

Built-in Data and Uptime Protection Solutions

License-free solutions help protect data and configurations on your Synology system, ensure maximum system uptime, and back up and restore all your devices, VMs, and cloud applications.

- **Synology High Availability** provides fast failover between two identical Synology units to keep services available without interruption
- **Snapshot Replication** provides schedulable, rapid data protection and restoration with version control, ensuring that all shared folders and LUNs on your Synology system remain safe and available
- **Hyper Backup** protects your Synology system with full-system backups and backups of shared folders and configurations to multiple destinations with deduplication, integrity checks, compression, and versioning
- **Synology Active Backup Suite** lets you consolidate protection of Windows clients and servers, Linux endpoints, Synology systems, VMware® and Hyper-V® VMs, Microsoft 365 and Google Workspace, maximizing storage efficiency with data deduplication technology
- **C2 Storage for Hyper Backup** offers a dedicated secure public cloud destination for Synology NAS backup data⁵

Advanced Data Security Measures

Synology offers a multi-layered approach to data security that protects against physical breaches, malicious attacks, and accidental deletions.

- Protect sensitive data against physical data breaches with **full-volume encryption**
- Safeguard your data against accidental or malicious deletion with **WORM-powered immutable snapshots** and **WriteOnce shared folders**
- **Active Insight**, Synology's cloud-based fleet monitoring solution, leverages machine learning to detect malware and other malicious activity and automatically creates immutable snapshots to protect your data

Collaboration in a Secure Cloud, Assisted by AI

Synology Office Suite provides a private cloud productivity solution for on-site and remote workers, as well as home users, to concurrently edit documents, share files, manage emails, send instant messages, organize media, and more.

- **Synology Office Suite AI** accelerates workflows by embedding generative capabilities directly into productivity apps to assist with drafting, summarizing, and analyzing data. It ensures data privacy through a centralized management console that locally masks sensitive information before it reaches third-party AI providers
- **Synology Drive** serves as a centralized hub to keep your files labeled and organized for easy access, offering granular file sharing permissions and customizable security features to ensure file safety
- **Synology Office** enables users to collaborate on documents, spreadsheets, and presentation slides in real time, with support for universal file formats and unlimited file versioning for easy restoration
- **Synology Chat** brings teams together with one-on-one conversations, group channels, and encrypted private channels
- **Synology MailPlus⁶** provides a secure, reliable, and private email server with advanced admin tools to simplify troubleshooting and increase server security
- **Synology Calendar** helps teams keep track of priorities with convenient calendar sharing and scheduling
- **Synology Contacts** enables organizations to manage and update address books with minimal effort
- **Synology Hybrid Share⁵** enhances multi-site teamwork with a global hybrid cloud file system which combines the scalability of the cloud with the fast local access provided by Synology systems

Reliable and Secure Virtualization and Containerization

Leverage your Synology system as virtual machine storage, VM backup server, and alternative container for VM host, with full certification for VMware[®] vSphere™, Microsoft[®] Hyper-V[®], Citrix[®] XenServer™, and OpenStack environments.

- **Synology Storage Console** for VMware or Windows platforms lets you manage VM storage components directly from your hypervisor. VMware VAAI integration and Windows ODX help offload storage operations and speed up data transfer
- **Host lightweight containers and VMs** for testing, sandboxing, and emergency recovery purposes with Container Manager and Synology Virtual Machine Manager, a native hypervisor

that supports Windows, Linux, and virtualized versions of DSM⁷

Build a Scalable and Centralized Surveillance System

Synology Surveillance Station transforms any Synology system into a powerful network video recorder (NVR) for single site surveillance, or it can serve as a central storage repository and management platform for multiple sites.⁸

- 17,000+ supported camera models
- ONVIF support for a broader selection of cameras
- Private, subscription-free storage of recordings
- Access through web browsers, desktop clients, and mobile apps
- Event-based rules to trigger specific actions
- Email, SMS, and push notification options
- Manage up to hundreds of sites centrally using **Synology Centralized Management System (CMS)**

Backed by Synology's 5-Year Limited Warranty


Maximize your return on investment with the **comprehensive hardware replacement** and **premium technical support services** offered under Synology's five-year limited warranty.⁹

Notes:


1. SSD cache requires [Synology SAT5200 Series 2.5" SATA SSDs](#) or compatible M.2 SSDs via adapter cards. Drives and adapter cards sold separately. See [compatibility list](#) for more info.
2. RS11626xs+ supports up to 116 drives with eight [Synology RX1222sas](#) Expansion Units, sold separately.
3. Performance figures obtained through internal testing by Synology. Actual performance may vary depending on the testing environment, usage, and configuration. See [performance charts](#) for more information.
4. For the complete and most up-to-date list of compatible NICs, HBAs, and other accessories, please check our [compatibility list](#).
5. C2 Storage for Hyper Backup and Hybrid Share requires purchase of an annual or monthly [subscription](#). A free trial is available for each newly registered device.
6. Five MailPlus email accounts are included. Additional email accounts can be added with the purchase of Synology MailPlus License Packs. [Learn more](#)
7. Certain advanced features require [Virtual Machine Manager Pro](#). One Virtual DSM license is included. Additional Virtual DSM instances require the purchase of [Virtual DSM Licenses](#).
8. Surveillance Station includes two free licenses. Connecting more cameras and devices requires additional licenses. [Learn more](#).
9. The warranty period starts from the date of purchase as stated on your purchase receipt. Visit <https://www.synology.com/company/legal/warranty> for more information.

Hardware Overview

Front

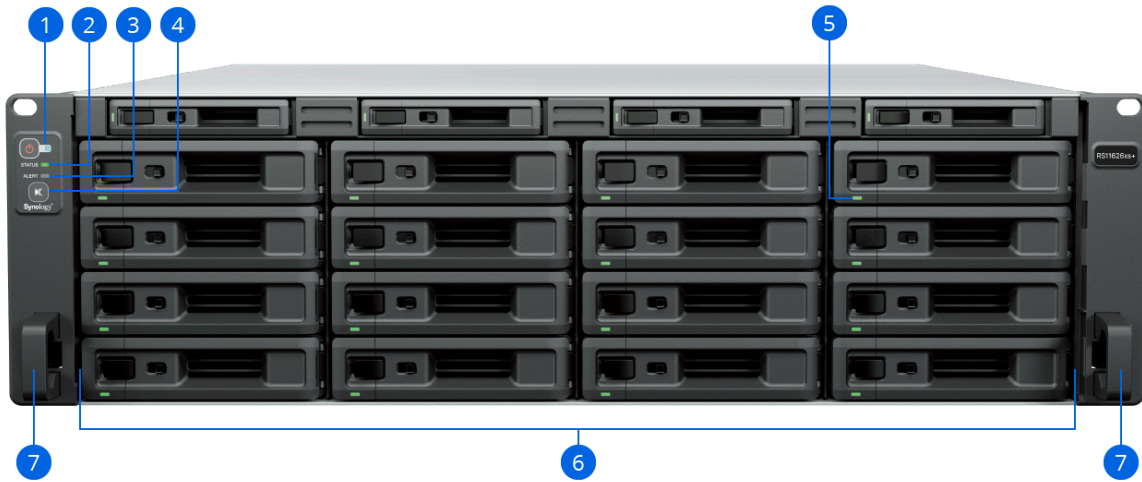

Rear

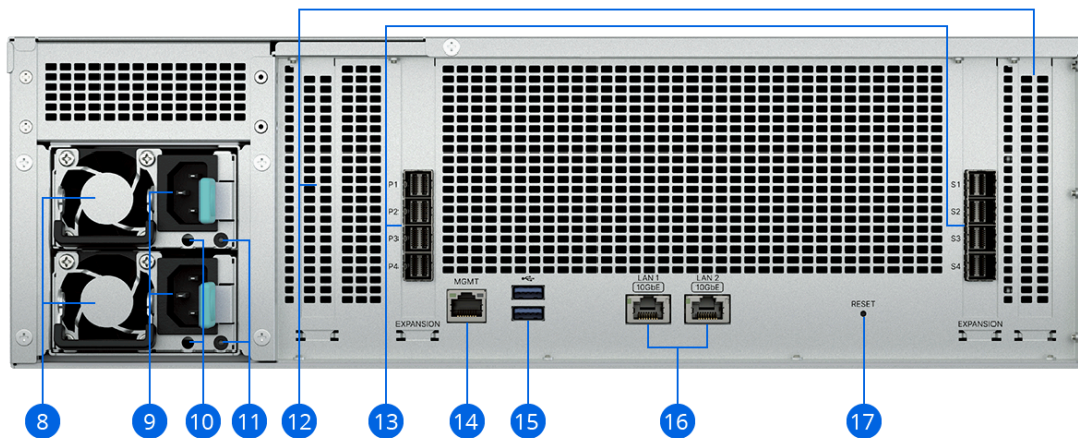

No.	Name	No.	Name
1.	Power button and indicator	10.	Mounting holes
2.	Status indicator	11.	PSU Indicators
3.	Alert indicator	12.	PCI Express expansion slots
4.	Alarm silence button	13.	Expansion ports
5.	Drive status indicators	14.	Management port

6.	Drive trays	15.	USB 3.2 Gen 1 ports
7.	Rail kit release tabs	16.	10GbE RJ-45 ports
8.	PSU fans	17.	Reset button
9.	Power ports		

Technical Specifications

Hardware

CPU	
CPU Model	AMD EPYC 7303
CPU Quantity	1
CPU Cores	16
CPU Threads	32
CPU Architecture	64-bit
CPU Frequency	2.4 (base) / 3.4 (turbo) GHz
Hardware Encryption Engine	Yes

Memory	
System Memory	64 GB DDR4 ECC RDIMM
Total Memory Slots	16
Maximum Memory Capacity	1024 GB (64 GB x 16)
Notes	Please select Synology memory modules for optimum compatibility and reliability. Synology will not provide complete product warranty or technical support if non-Synology memory modules are used for memory expansion.

Storage

Drive Bays	20 (3.5"/2.5" x 16 + 2.5" x 4)
Maximum Drive Bays with Expansion Unit	116 (RX1222sas x 8)
SAS multipathing	Yes
Drive Type	<ul style="list-style-type: none">• 3.5" SATA HDD• 2.5" SATA SSD
Hot Swappable Drive	Yes
Notes	Compatible drives are mandatory. Please consult our compatibility list before purchasing hard drives. For more details, please refer to this article .

External Ports

RJ-45 10GbE LAN Port	2
Out-of-Band Management LAN Port	1
USB 3.2 Gen 1 Port	2
Expansion Port	8
Expansion Port Type	Mini-SAS HD

PCIe

PCIe Expansion	2 x Gen4 x16 slot (x16 link)
----------------	------------------------------

Appearance

Form Factor (RU)	3U
Size (Height x Width x Depth)	132.3 mm x 482 mm x 724 mm
Weight	19.68 kg
Rack Installation Support	4-post 19" rack (Synology Rail Kit - RKS-02)
Notes	The rail kit is sold separately

Others

System Fan	80 mm x 80 mm x 38 mm x 4 pcs
AC Input Power Voltage	100V to 240V AC
Power Frequency	50/60 Hz, Single Phase

Temperature	
Operating Temperature	0°C to 35°C (32°F to 95°F)
Storage Temperature	-20°C to 60°C (-5°F to 140°F)
Operating Humidity	8% to 80% RH
Storage Humidity	5% to 95% RH
Maximum Operating Altitude	5,000 m

General DSM Specifications

Storage Management	
Maximum Single Volume Size	<ul style="list-style-type: none"> • 1 PB (for RAID 6 groups only) • 200 TB • 108 TB
Maximum Internal Volume Number	32
SSD Read/Write Cache (Determining cache size)	Yes
Supported RAID Type	<ul style="list-style-type: none"> • RAID F1 • Basic • JBOD • RAID 0 • RAID 1 • RAID 5 • RAID 6 • RAID 10
Notes	<ul style="list-style-type: none"> • Volumes over 108 TB require 32 GB of memory or more. • Certain conditions are required to support a 1 PB volume. Please refer to this article for more information. • Actual maximum storage pool and volume sizes depend on drive sizes used, the number of drive bays available, and the RAID configuration. • Usable capacity for each volume will be lower than the maximum volume size and is dependent on the filesystem and the amount of system metadata stored.

File System

Internal Drives	Btrfs
External Drives	<ul style="list-style-type: none">• Btrfs• ext4• ext3• FAT32• NTFS• HFS+• exFAT

File Services

File Protocol	<ul style="list-style-type: none">• SMB• AFP• NFS• FTP• WebDAV• Rsync
Maximum Number of SMB Connections (FSCT-Based)	10,000
Windows Access Control List (ACL) Integration	Yes
NFS Kerberos Authentication	Yes

Account & Shared Folder

Maximum Local User Accounts	15,360
Maximum Local Groups	512
Maximum Shared Folder	512
Maximum Shared Folder Sync Tasks	32

Virtualization

VMware vSphere	ESXi 8.0 U2, ESXi 8.0 U1, ESXi 8.0, ESXi 7.0 U3, ESXi 7.0 U2, ESXi 7.0 U1, ESXi 7.0, ESXi 6.7 U3, ESXi 6.7 U2, ESXi 6.7 U1, ESXi 6.7, ESXi 6.5 U3, ESXi 6.5 U2, ESXi 6.5 U1, ESXi 6.5
Microsoft Hyper-V	Windows Server 2022
Citrix XenServer	XenServer 8, Citrix Hypervisor 8.2 LTSR CU1
OpenStack	Cinder

Security

Firewall, encryption shared folder, SMB encryption, FTP over SSL/TLS, SFTP, rsync over SSH, login auto block, Let's Encrypt support, HTTPS (customizable cipher suite)

General Specifications

Supported Protocols	SMB1 (CIFS), SMB2, SMB3, NFSv3, NFSv4, NFSv4.1, NFS Kerberized sessions, iSCSI, Fibre Channel, HTTP, HTTPS, FTP, SNMP, LDAP, CalDAV
Supported Browsers	<ul style="list-style-type: none">• Chrome• Firefox• Edge• Safari
Supported Language	English, Deutsch, Français, Italiano, Español, Dansk, Norsk, Svenska, Nederlands, Русский, Polski, Magyar, Português do Brasil, Português Europeu, Türkçe, Český, ภาษาไทย, 日本語, 한국어, 繁體中文, 简体中文
Notes	For an updated list of supported browser versions, check the DSM Technical Specifications .

Packages and Applications

Synology AI Console

Centralize AI management with flexible configurations for AI model integration, user access control, data privacy, usage policies, and resource allocation

Third-Party AI Model Integration	v
Maximum De-Identification Rate	12,000 words per second
Notes	<ul style="list-style-type: none"> De-identification performance measurement: Filters for Credit Card Numbers, IBAN, Individual Taxpayer Identification Number, SSN, and Names applied to a 4,355-word English text. To enable de-identification, your device must have at least 8 GB of memory and Container Manager installed.

Synology Drive

Synchronizes files across Windows®, macOS®, Linux®, Android™ and iOS. The built-in cross-platform portal allows access to data anytime and anywhere

Maximum Number of Users	37,300
Maximum Number of Hosted Files	100,000,000 (applies to files indexed or hosted by Synology Drive . For file access through other standard protocols, refer to the File Services section above)

File Station

Provides virtual drives, remote folders, Windows® ACL editor, compression/extraction of archived files, bandwidth control for specific users/groups, creation of sharing links, and transfer logs

Hybrid Share

Synchronize data across multiple sites for fast and efficient multi-site teamwork. Powered by Synology C2 Storage, Hybrid Share requires purchase of a monthly or annual subscription

SAN Manager

Maximum iSCSI Target Number	256
Maximum LUN	512
LUN Clone/Snapshot, Windows ODX	Yes

Virtual Machine Manager

Recommended Virtual Machine Instances	32 (Learn more)
Recommended Virtual DSM Number (Licenses required)	32 (including 1 Free License)

Hyper Backup

Supports local backup, network backup, and data backup to other servers and public clouds, including C2 Storage

Snapshot Replication

Maximum Snapshots per Shared Folder	1,024
Maximum Snapshots per LUN	256
Maximum Snapshots per System	65,536
Maximum Replication Tasks for Shared Folders	128
Maximum Replication Tasks for LUNs	64
Maximum Replication Tasks per System	128

Synology High Availability

Reduces service downtime by combining two identical NAS into a high-availability cluster

Synology Chat

Maximum Number of Users	1,500
-------------------------	-------

Synology Office

Maximum Number of Users	36,200
-------------------------	--------

Synology MailPlus / MailPlus Server

A secure, reliable, and private mail solution featuring high-availability, load balancing, security, and filtering options

Free Email Accounts	5 (Additional accounts require purchase of licenses)
Maximum Number of Users	25,000

Surveillance Station

Default Licenses	2 (Additional cameras require purchase of licenses)
Maximum IP Cameras and Total FPS (H.264)	<ul style="list-style-type: none">• 1080p: 400 channels, 4000 FPS• 3M: 300 channels, 3000 FPS• 5M: 200 channels, 2000 FPS• 4K: 150 channels, 1500 FPS
Maximum IP Cameras and Total FPS (H.265)	<ul style="list-style-type: none">• 1080p: 450 channels, 13500 FPS• 3M: 400 channels, 4000 FPS• 5M: 300 channels, 3000 FPS• 4K: 200 channels, 2000 FPS

Central Management System

Provides a single interface to manage and monitor multiple Synology NAS

VPN Server

Maximum Connections	32
---------------------	----

Other packages

Additional 3rd-party packages are available in the Package Center

Environment & Packaging

Environment safety

RoHS Compliant

Packaging Content

- Main Unit X 1
- Accessory Pack X 1
- C13 to C14 power cord X 2
- Front Cover X 1

Optional Accessories

- DDR4 ECC RDIMM: D4ER02-64G
- Expansion Units: [RX1222sas](#)
- Enterprise Series 3.5" SATA HDD: [HAT5300 Series](#)
- Enterprise Series 2.5" SATA SSD: [SAT5200 Series](#)
- M.2 SSD & 10GbE Combo Adapter Card: [E10M20-T1](#)
- M.2 SSD Adapter Card: [M2D20](#)
- 25GbE Network Interface Card: [E25G30-F2](#)
- 10GbE Network Interface Card: [E10G30-F2/E10G30-T2/E10G30-T1](#)
- Rail Kit Sliding: [RKS-02](#)

Notes

For multi-module memory configurations, all modules must be identical and share the same model number. Check the [Product Manual](#) of your Synology product for recommended memory configurations.

Warranty

5 Years

Notes

The warranty period starts from the purchase date as stated on your purchase receipt. ([Learn more](#))

SYNOLOGY INC. © 2026, Synology Inc. All rights reserved. Synology, the Synology logo are trademarks or registered trademarks of Synology Inc. Other product and company names mentioned herein may be trademarks of their respective companies. Synology may make changes to specification and product descriptions at anytime, without notice.